


# 产品技术规格

一开开关



外观颜色:

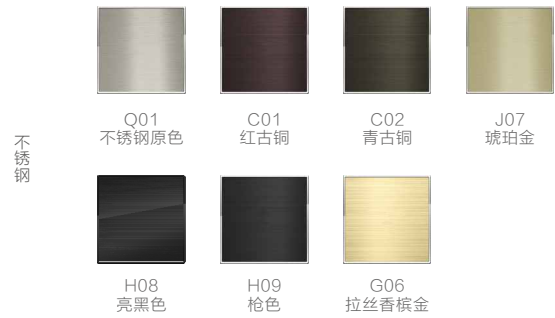

## 常规信息

接线方式:	强电485	弱电485	220V强电	强电互联互通	KNX总线	无线Zigbee	弱电干接点
平台名称:	F平台	●	●	●	●	●	●
开关类别:	轻触开关	●	●	●	●	●	●
系列名称:	V9-ZM	●	●	●	●	●	●
输入电压:	AC220V	DC12V/24V	AC220V	AC220V	DC12V/24V	AC220V	DC12V/24V
阻性负载:	单路/总路数 ≤1000W	×	●	●	●	●	×
容性/感性负载:	单路≤200W	×	●	●	●	●	×
共阴共阳:	×	×	×	×	×	×	●
零火线:	●	×	●	●	×	●	×
通讯端子接口:	●	●	×	●	●	×	×
第三方RCU:	●	●	×	×	KNX	网关	×
安装方式:	国标86安装底盒	●	●	●	●	●	●
继电器:	16A	●	●	●	×	●	×
变背光功能:	●	●	●	●	●	●	●
触按寿命:	10万次	●	●	●	●	●	●
外框支架:	J钢架连支架（横装、竖装）、Z塑料窄边框、K塑料宽边框、L铝边框、X锌合金边框						
产品特点:	跑车尾灯式设计、锌合金边框、防眩光设计、多色可选、场景文字定制、变背光、多种接线方案						

## 材质

表面材质:	不锈钢锌合金包边	●	●	●	●	●	●
表面处理:	纳米电镀工艺	●	●	●	●	●	●

## 尺寸

产品尺寸:	W:86 H:86 D:9mm (不含底座)	●	●	●	●	●	●
预埋深度:	≥45mm	≥45mm	≥45mm	≥45mm	≥15mm	≥45mm	≥15mm
可做连体:	单 体、二连体、 三连体、四连体;	●	●	●	●	●	●